


RCCN 日成NBN型 45度金属软管接头 Conduit Fittings

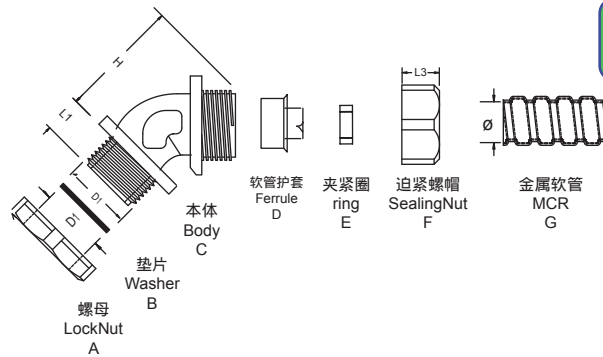

螺牙规格:管螺纹G/PF牙,公制螺纹Metric,德制螺纹 PG
 产品材质:A.C.F部位均采用优质钢制成.B.E采用丁腈橡胶(NBR)制成.D为铁皮压铸制成.
 产品认证:欧洲CE,欧洲环保RoHS
 颜色种类:金属色(银白色)
 工作温度:-40°C至100°C,瞬间可耐高达120°C.
 产品特性:1.接合后和箱体成45度,加厚型锌合金镀锌或硬铬,外型美观,结构紧密,强度高.
 2.除以下标准规格外,可另按需求任意变动大小及螺纹标准.

Thread:G/PF, Metric, PG
 Material:A.C.F are made from zinc metal.B.E are made of NBR.D is made of iron sheet .
 Certificates:CE RoHS
 Color:Argentine(silver)
 Protect class:IP6
 Operate T.: -40°C to 100°C, 120°C in a short time.
 Features: 1.90°between items and box after joining,thickness added zinc coated metal
 2.special thread can be produced

单位/Unit:mm

型号 Item No.	螺牙标准 Thread	配套日成金属软管 RCCN MCR suitable RCCN metal flexible conduit MCR			螺纹外径 Thread O.D. D1	螺纹长度 Thread Length L1	高度 Height H	包装 Packing pcs
		对应型号 Corresponding item no	公制 Metric ϕ	英制 British				
管螺纹 NBN-G								
NBN-04G	G3/8"	MCR-04	13	3/8"	16.66	8	50	30
NBN-05G	G1/2"	MCR-05	16	1/2"	20.95	11	54	30
NBN-06G	G3/4"	MCR-06	20	3/4"	26.44	14	70	30
NBN-08G	G1"	MCR-08	25	1"	33.25	15	80	20
NBN-10G	G1 1/4"	MCR-10	32	1 1/4"	42.91	15	90	20
NBN-12G	G1 1/2"	MCR-12	38	1 1/2"	47.8	16	110	20
NBN-16G	G2"	MCR-16	51	2"	59.6	18	130	10
NBN-20G	G2 1/2"	MCR-20	64	2 1/2"	75.18	22	190	10
NBN-24G	G3"	MCR-24	80	3"	87.88	22	220	5
NBN-32G	G4"	MCR-32	100	4"	113	24	250	5
公制螺纹 NBN-M								
NBN-04M	M16*1.5	MCR-04	13	3/8"	16	8	50	30
NBN-05M	M20*1.5	MCR-05	16	1/2"	20	11	54	30
NBN-06M	M25*1.5	MCR-06	20	3/4"	25	14	70	30
NBN-08M	M32*1.5	MCR-08	25	1"	32	15	80	20
NBN-10M	M40*1.5	MCR-10	32	1 1/4"	40	15	90	20
NBN-12M	M50*1.5	MCR-12	38	1 1/2"	50	16	110	20
NBN-16M	M63*1.5	MCR-16	51	2"	63	18	130	10
德制螺纹 NBN-PG								
NBN-04P	PG11	MCR-04	13	3/8"	18.6	8	50	30
NBN-05P	PG13.5	MCR-05	16	1/2"	20.4	11	54	30
NBN-06P	PG21	MCR-06	20	3/4"	28.3	14	70	30
NBN-08P	PG29	MCR-08	25	1"	37	15	80	20
NBN-10P	PG29	MCR-10	32	1 1/4"	37	15	90	20
NBN-12P	PG36	MCR-12	38	1 1/2"	47	16	110	20
NBN-16P	PG48	MCR-16	51	2"	59.3	18	130	10

